

# 116TX

100 SERIES  
Unmanaged Switch



## PRODUCT FEATURES

- Sixteen 10/100BaseTX RJ-45 ports
- Slim, space-saving design
- -40°C to 85°C operating temperature
- IEEE 802.3 compliance
- ESD and surge protection diodes on all ports
- Store-and-forward technology
- Supports full/half duplex operation
- Full wire speed communications
- Up to 3.2 Gb/s maximum throughput
- Auto negotiation, auto sensing speed, duplex, and flow control
- MDIX auto sensing cable
- Redundant power inputs (10-49 VDC)
- LED link/activity status indication
- Rugged DIN-rail enclosure
- >2M Hours MTBF

## BUILT FOR EXTREME CONDITIONS

The compact N-Tron® 116TX unmanaged Industrial Ethernet switch is ideal for industrial applications that demand dependable performance under harsh conditions. The compact 16-port device offers exceptional reliability and performance for a range of mission-critical applications including data acquisition, Ethernet I/O and process control.

Delivered in a rugged industrial metal enclosure, the 116TX provides 16 high-performance 10/100BaseTX copper ports with full wire speed communications—up to 3.2 Gb/s throughput—for robust network support. The unit boasts exceptional MTBF and extended tolerances to shock, vibration, temperature fluctuations and noise—common elements in factory floor control networks, utilities, wastewater treatment, wind turbines, rail car, intelligent traffic control and transportation applications.

## EASY TO USE

The compact 116TX is an excellent plug & play solution. For convenience, the unit configures itself on the network at connection and features auto sensing 10/100BaseTX ports that intuitively negotiate speed and data flow. Automatic features enable instant recognition of network changes and/or updates, adjusting communications on the fly.

## Excellent Network Support

Compact and powerful, the 116TX is designed with advanced communication processing, store-and-forward technology and high-speed processing that allows full wire speed on all ports simultaneously. The unit is optimized for increased determinism and eliminates virtually all network collisions. The 16 high-performance network ports instantly recognize and resolve 10/100BaseTX, MDIX and duplex conflicts. For added convenience, LEDs are provided to display link status and activity for each port.

# 116TX

## SPECIFICATIONS

### Case Dimensions

Height: 5.8" (14.6 cm)  
Width: 2.0" (5.1 cm)  
Depth: 4.1" (10.2 cm)  
Weight: 1.1 lb. (.48 kg)  
DIN-Rail: 35mm

### Electrical

Redundant Input Voltage: 10-49 VDC (regulated)  
Input Current (max): 300 mA@24 VDC  
BTU/hr: 24.6@24 VDC  
N-TRON Power Supply: NTPS-24-1.3 (1.3A@24V)

### Environmental

Operating Temperature: -40°C to 85°C  
Storage Temperature: -40°C to 85°C  
Operating Humidity: 10% to 95% (non condensing)  
Operating Altitude: 0 to 10,000 ft.

### Shock and Vibration (Bulkhead Mounted)

Shock: 200g@10ms  
Vibration/Seismic: 50g, 5-200hz triaxial

### Reliability

MTBF: >2 million hours

### Network Media

10BaseT: ≥Cat3 cable  
100BaseTX: ≥Cat5 cable

### Connectors

10/100BaseTX: Sixteen (16) RJ-45 copper ports

### Recommended Wiring Clearance

Top: 1" (2.6 cm)  
Front: 2" (5.1 cm)

### Designed to comply with


- IEEE 1613 for electric utility substations
- NEMA TS1/TS2 for traffic control

### Regulatory Certifications


- Safety: Class I, Division 2, Groups A, B, C and D, T4
- EMI: ANSI C63.4; FCC CFR Title 47, Part 15, Subpart B - Class A; ICES-003 – Class A
- EMC: EN61000-6-4 – Class A (Emissions), EN 55024 (Immunity), EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (RF), EN61000-4-8 (PFMF), EN61000-4-11 (VDI)
- GOST-R certified

Further information regarding this product's regulatory conformity can be found on the N-Tron website at [www.n-tron.com/regulatory](http://www.n-tron.com/regulatory)



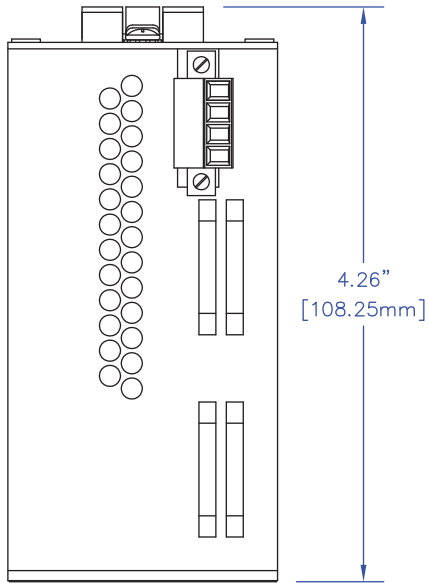

TOP

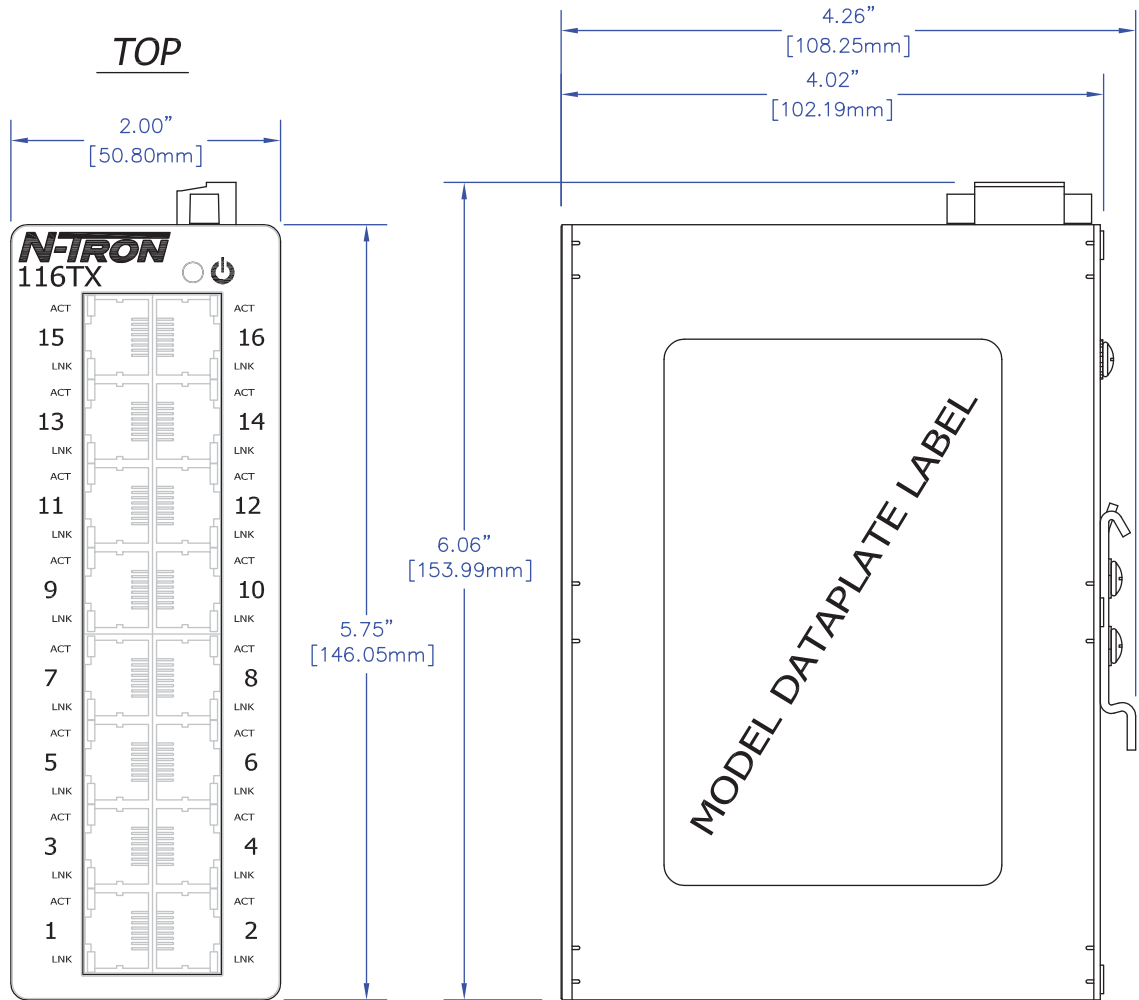


FRONT

RIGHT SIDE

# 116TX

## ORDERING INFORMATION

PART NUMBER	DESCRIPTION
116TX.....	Sixteen-port (16 10/100BaseTX Ports) Industrial Ethernet switch
NTPS-24-1.3.....	N-TRON DIN-rail power supply (1.3 amp@24VDC)



**PACIFIC PARTS  
& CONTROLS, INC.**

6255 Prescott Court Chino, CA 91710  
909-465-1174 fax 909-465-1178  
www.pacificparts.com

© 2011 N-TRON, Corporation. N-Tron and the N-Tron logo are trademarks of N-TRON, Corporation. Product names mentioned herein are for identification purposes only and may be trademarks and/or registered trademarks of their respective company. The responsibility for the use and application of N-Tron products rests with the end user. N-Tron makes no warranties as to the fitness or suitability of any N-Tron product for any specific application. N-Tron Corporation shall not be liable for any damage resulting from the installation, use, or misuse of this product. Specifications subject to change without notice. REV 2011.02.22

**QUALITY MANAGEMENT SYSTEM  
CERTIFIED BY DNV**  
**ISO 9001:2008**